



The NETGEAR® Intelligent Edge M4100 series consists of 12 fully managed switches, ranging from 8-port Fast Ethernet to 50-port Gigabit Ethernet. They are ideal for all organizations considering reliable, affordable and simple access layer switching with CLI, advanced scripting capabilities and Layer 3 routing.

As a cost-effective component of converged voice, video and data networking solutions, NETGEAR M4100 series delivers a secure edge in commercial buildings and campus LAN environments: PoE (802.3af) and PoE+ (802.3at) versions of M4100 series are perfect for Wireless access points, IP telephony and IP surveillance deployments.

Highlights

Layer 2+ with static routing

- M4100 series comes with Port-based/ VLAN-based/Subnet-based “static routing” Layer 2+ versions
- L3 fixed routes to the next hop towards the destination network are added to the routing table
- L3 routing is wire-speed in M4100 series hardware with 64 static routes (IPv4)

Engineered for convergence

- Automatic multi-vendor Voice over IP prioritization based on SIP, H323 and SCCP protocols
- Voice VLAN and LLDP-MED for automatic IP phones QoS and VLAN configuration
- Advanced classifier-based hardware for L2, L3, L4 security and prioritization
- Advanced Multicast filtering with IGMP and MLD snooping and querier modes

High-value performance and IPv6 ready

- 16K MAC addresses; up to 100Gbps switching fabric; 9K jumbo frames; Green Ethernet
- IPv4/IPv6 ingress traffic filtering (ACLs) and prioritization (QoS - DiffServ)

High availability and PoE/PoE+ full power capability

- Redundant power supply option for uninterruptible operation (RPS)
- External power supply option for PoE and PoE+ full power applications (EPS up to 1,440W)

Industry standard management

- Industry standard command line interface (CLI)
- Fully functional NETGEAR web interface (GUI)

Industry leading warranty

- NETGEAR M4100 series is backed by NETGEAR ProSAFE Lifetime Hardware Warranty†
- Also included ProSupport Lifetime 24x7 Advanced Technical Support*
- Also included 3-Year Next Business Day Onsite Hardware Replacement**

| | |
|--------------|---|
| Page 2 – 4 | Models at a glance |
| Page 5 | Product brief |
| Page 6 – 9 | Modern access layer features highlights |
| Page 10 – 11 | Target application and why M4100 series |
| Page 12 – 15 | Accessories and modules |
| Page 16 – 36 | Technical specifications and ordering information |



Hardware at a Glance

| Model Name | FRONT | | | | | | REAR | | | | | Model number |
|-----------------|-------------|--------------------------|-------------------------------|---------------------------|--------------------------|-------------------------|------------------------------|-----------------|--------------------------------|-----------------------|--|---------------|
| | Form Factor | 10/100 Base-T RJ45 ports | 10/100/1000 Base-T RJ45 ports | 100/1000X Fiber SFP ports | PoE 802.3af PoE+ 802.3at | Storage (image, config) | Power Supply/ Powered by PoE | RPS (connector) | PoE budget (PSU/ Pass through) | PoE budget (with EPS) | Management console | |
| M4100-D10-POE | Desktop | 8 | 2 | 2 (shared) | 8 PoE 802.3af | 1 x USB | External/ No | - | 66W | - | 1 x RS232 DB9, 1 x Mini-USB (selectable) | FSM5210P |
| M4100-26-POE | Rack mount | 24 | 2 | 2 (shared) | 24 PoE 802.3af | | Internal/ No | 1 (RPS) | 380W | - | | FSM7226P |
| M4100-50-POE | Rack mount | 48 | 2 | 2 (shared) | 48 PoE 802.3af | | Internal/ No | 1 (RPS or EPS) | 380W | Up to 740W (EPS) | | FSM7250P |
| M4100-D12G | Desktop | - | 12 | 2 (shared) | - | | External/ Yes | PD mode | - | - | | GSM5212 |
| M4100-D12G-POE+ | Desktop | - | 12 | 4 (shared) | 10 PoE+ 802.3at | | Internal/ Yes | PD mode | 120W/ 25W | - | | GSM5212P v1h2 |
| M4100-12GF | Rack mount | - | 12 | 12 (shared) | 4 PoE+ 802.3at | | Internal/ No | 1 (RPS) | 150W | - | | GSM7212F v1h2 |
| M4100-12G-POE+ | Rack mount | - | 12 | 4 (shared) | 12 PoE+ 802.3at | | Internal/ No | 1 (RPS) | 380W | - | | GSM7212P v1h2 |
| M4100-26G | Rack mount | - | 26 | 4 (shared) | - | | Internal/ No | 1 (RPS) | - | - | | GSM7224 v2h2 |
| M4100-50G | Rack mount | - | 50 | 4 (shared) | - | | Internal/ No | 1 (RPS) | - | - | | GSM7248 v2h2 |
| M4100-26G-POE | Rack mount | - | 26 | 4 (shared) | 24 PoE 802.3af | | Internal/ No | 1 (RPS or EPS) | 192W | Up to 380W (EPS) | | GSM7226LP |
| M4100-24G-POE+ | Rack mount | - | 24 | 4 (shared) | 24 PoE+ 802.3at | | Internal/ No | 1 (RPS or EPS) | 380W | Up to 720W (EPS) | | GSM7224P v1h2 |
| M4100-50G-POE+ | Rack mount | - | 50 | 4 (shared) | 48 PoE+ 802.3at | | Internal/ No | 1 (RPS or EPS) | 380W | Up to 1,440W (EPS) | | GSM7248P |



Hardware at a Glance



M4100-D10-POE is a desktop 8 x 100Base-T PoE version, Layer 2+

- 2 Gigabit ports with 2 shared SFP
- External PSU, fanless
- 66W budget



M4100-26-POE is a 24 x 100Base-T PoE version, Layer 2+

- 2 Gigabit ports with 2 shared SFP
- Internal PSU with RPS
- 380W budget



M4100-50-POE is a 48 x 100Base-T PoE version, Layer 2+

- 2 Gigabit ports with 2 shared SFP
- Internal PSU with RPS/EPS
- 380W budget and up to 720W with EPS

Powered by PoE



M4100-D12G is a desktop 12 x 1000Base-T version, Layer 2+

- 2 shared SFP
- External PSU; fanless
- Can be powered by PoE+



M4100-12GF is a 12 x SFP version for aggregation, Layer 2+

- 12 shared 1000Base-T
- Internal PSU with RPS
- 4 ports PoE+ with 150W budget



M4100-12G-POE+ is a 12 x 1000Base-T PoE+ version, Layer 2+

- 4 shared SFP
- Internal PSU with RPS
- 380W budget

PoE “passthrough” technology



M4100-D12G-POE+ is a desktop 12 x 1000Base-T version, Layer 2+

- 4 shared SFP; 2 ports PoE+ “in” and 10 ports PoE+ “out”
- Internal PSU with low acoustics; 120W budget
- Can be powered by PoE+ and redistribute 25W PoE budget



M4100-26G is a 26 x 1000Base-T version, Layer 2+

- 4 shared SFP
- Internal PSU with RPS



M4100-50G is a 50 x 1000Base-T version, Layer 2+

- 4 shared SFP
- Internal PSU with RPS



M4100-26G-POE is a 24 x 1000Base-T PoE version, Layer 2+

- 2 x 1000Base-T and 4 shared SFP
- Internal PSU with RPS/EPS
- 192W budget and up to 380W with EPS



M4100-24G-POE+ is a 24 x 1000Base-T PoE+ version, Layer 2+

- 4 shared SFP
- Internal PSU with RPS/EPS
- 380W budget and up to 720W with EPS



M4100-50G-POE+ is a 48 x 1000Base-T PoE+ version, Layer 2+

- 2 x 1000Base-T and 4 shared SFP
- Internal PSU with RPS/EPS
- 380W budget and up to 1,440W with EPS

Software at a Glance

| | LAYER 2+ PACKAGE | | | | | | | | |
|--------------|--|----------------------------------|--|-----------|-------------------------------------|---|---------------------------------|---|--------------|
| Model Name | Management | IPv4/IPv6 ACL and QoS, DiffServ | IPv4/IPv6 Multicast Filtering | Auto-VoIP | Green Ethernet | VLANs | Convergence | IPv4 Unicast Static Routing | Model Number |
| M4100 series | Web GUI: HTTPs; CLI: Telnet, SSH; SNMP | L2, L3, L4, ingress 1 Kbps | IGMP and MLD Snooping, IGMP and MLD Querier, MVR | Yes | EEE (802.3az) or Energy Detect Mode | Static, Dynamic, Voice, MAC, Subnet, Protocol-based, QoQ, Private VLANs | LLDP-MED, RADIUS, 802.1X, timer | Yes (Port-based, Subnet, VLANs, Loopback) | all models |

Performance at a Glance

| | TABLE SIZE | | | | | | | | | |
|----------------------------|---------------|---------------------------------|--------------------------------|---|---------------------------------------|--------------------------------------|--|------------------------------------|--|--------------|
| Model Name | Packet buffer | CPU | ACLs | MAC address table ARP/NDP table VLANs DHCP server | Fabric | Latency | Static Routes IP interfaces | Multicast IGMP Group membership | sFlow | Model number |
| M4100 series all models | 12 Mb | 600Mhz 128M RAM 32M Flash | 50 ACLs 512 rules (ingress) | 16K MAC 512 ARP/NDP VLANs: 1K DHCP: 16 pools 1,024 max leases | Up to 100Gbps all models line-rate | 1G <3.91 µs 100M <10.194 µs | 64 static routes 64 IP interfaces IPv4 | 1K | 32 samplers 52 pollers 8 receivers | all models |



Product Brief

M4100 series

The Intelligent Edge M4100 series switches are NETGEAR fully managed switches for 100M/1G access layer in SMB, Small Enterprise and Campus networks. The M4100 series delivers the best combination of performance, security and convergence at a high-value price point—unlike competitive, entry-level “SMB” solutions. Redundant power supply options (RPS), full PoE+ external power supply options (EPS), Private VLANs, LLDP-MED and MVR take a scalable, future-proof approach to delivering network services for Wireless access points, IP phones and IP cameras infrastructures.

NETGEAR Intelligent Edge M4100 series key features:

- Broad portfolio of access layer solutions, ranging from 8 ports Fast Ethernet to 50 ports Gigabit Ethernet
- 802.3af PoE and 802.3at PoE+ best fit, ranging from 66W to 1,440W power budget per switch
- IPv4 routing in Layer 2+ package (L3 static routing) with IPv4/IPv6 ACLs and QoS
- High value L2/L3 tables with 16K MAC, 512 ARP/NDP, 9K jumbo frames, 1K VLANs, 64 static L3 routes
- Redundant power supply option for uninterruptible operation (RPS)
- External power supply option for PoE and PoE+ full-power applications (EPS)
- Green Ethernet compliance for maximum power efficiency

NETGEAR Intelligent Edge M4100 series software features:

- Automatic multi-vendor Voice over IP prioritization based on SIP, H323 and SCCP protocol detection
- Voice VLAN and LLDP-MED for automatic IP phones QoS and VLAN configuration
- IPv4/IPv6 Multicast filtering with IGMP and MLD snooping, Querier mode and MVR for simplified video deployments
- Advanced classifier-based hardware implementation for L2 (MAC), L3 (IP) and L4 (UDP/TCP transport ports) inbound security and prioritization

NETGEAR Intelligent Edge M4100 series link aggregation and channeling features:

- Flexible Port-Channel/LAG (802.3ad) implementation for maximum compatibility, fault tolerance and load sharing with any type of Ethernet channeling
- Including static (selectable hashing algorithms) or dynamic LAGs (LACP)

NETGEAR Intelligent Edge M4100 series management features:


- DHCP/BootP innovative auto-installation including firmware and configuration file upload automation
- Industry standard SNMP, RMON, MIB, LLDP, AAA and sFlow implementation
- Selectable serial RS232 DB9 and Mini-USB port for management console
- Standard USB port for local storage, configuration or image files
- Dual firmware image and configuration file for updates with minimum service interruption
- Industry standard command line interface (CLI) for IT admins used to other vendors commands
- Fully functional Web console (GUI) for IT admins who prefer an easy to use graphical interface

NETGEAR Intelligent Edge M4100 series warranty and support:

- NETGEAR ProSAFE Lifetime Hardware Warranty†
- Included ProSupport Lifetime 24x7 Advanced Technical Support*
- Included 3-Year Next Business Day Onsite Hardware Replacement**



Modern access layer features highlights
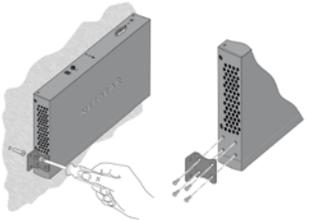
| Layer 3 hardware with L2+ software affordability | |
|---|--|
| M4100 series models are built upon L3 hardware platform while Layer 2+ software package allows for better budget optimization | <ul style="list-style-type: none"> M4100 series uses latest generation silicon low-power 40-nanometer technology M4100 series L2 and L3 switching features (access control list, classification, filtering, IPv4 routing) are performed in hardware at interface line rate for voice, video, and data convergence |
| M4100 series Layer 2+ software package provides straight forward IP static routing capabilities for physical interfaces, VLANs and subnets | <ul style="list-style-type: none"> Fast Ethernet 802.3af PoE: M4100-D10-POE (8 ports desktop); M4100-26-POE (24 ports); M4100-50-POE (48 ports) Gigabit: M4100-D12G (12 ports desktop); M4100-12GF (12 ports Fiber); M4100-26G (26 ports); M4100-50G (50 ports) Gigabit 802.3af PoE: M4100-26G-POE (24 ports) Gigabit 802.3at PoE+: M4100-D12G-POE+ (12 ports desktop); M4100-12G-POE+ (12 ports); M4100-24G-POE+ (24 ports); M4100-50G-POE+ (48 ports) At the edge of campus networks or in the server room, static routes are often preferred for simplicity (L3 fixed routes to the next hop towards the destination network are manually added to the routing table), without any impact on performance because L3 routing is wire-speed in M4100 series hardware |
| High-value switching performance | |
| 16K MAC address table, 1K concurrent VLANs and 64 static routes for SMB and small enterprise access layers | |
| 80 PLUS certified power supplies for energy high efficiency | |
| Green Ethernet with Energy Efficient Ethernet (EEE) defined by IEEE 802.3az Energy Efficient Ethernet Task Force | <ul style="list-style-type: none"> M4100-D12G; M4100-26G; M4100-50G; M4100-26G-POE; M4100-50G-POE+ |
| Green Ethernet with Energy Detect Mode (unused ports automatic power off) | <ul style="list-style-type: none"> M4100-D10-POE; M4100-26-POE; M4100-50-POE; M4100-D12G-POE+; M4100-12GF; M4100-12G-POE+; M4100-24G-POE+ |
| Increased packet buffering with up to 12 Mb dynamically shared across all interfaces for most intensive virtualization applications | |
| Low latency at all network speeds | |
| Jumbo frames support of up to 9Kb accelerating storage performance for backup and cloud applications | |
| Ease of deployment | |
| Placement outside the wiring closet (conference rooms, offices, class rooms, sales floor in retail stores, etc...) | <ul style="list-style-type: none"> For secure deployment in open areas, desktop versions come with a Wall Mount Kit with four brackets M4100-D10-POE (FSM5210P) M4100-D12G (GSM5212) M4100-D12G-POE+ (GSM5212P) As an option, a Rack Mount Kit is orderable (420-10043-01) |
|  <p><i>Installing M4100 desktop series on a Wall</i></p> | |

Modern access layer features highlights

| | |
|--|--|
| <p>Select desktop versions also come with a set of strong magnets for mounting on any metal surface</p> | <ul style="list-style-type: none"> • M4100-D10-POE (FSM5210P) • M4100-D12G (GSM5212)  <p><i>Installing M4100 desktop series using Magnets</i></p> |
| <p>Automatic configuration with DHCP and BootP Auto Install eases large deployments with a scalable configuration files management capability, mapping IP addresses and host names and providing individual configuration files to multiple switches as soon as they are initialized on the network</p> | |
| <p>Both the Switch Serial Number and Switch primary MAC address are reported by a simple "show" command in the CLI - facilitating discovery and remote configuration operations</p> | |
| <p>Automatic Voice over IP prioritization with Auto-VoIP simplifies most complex multi-vendor IP telephones deployments either based on protocols (SIP, H323 and SCCP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address; providing the best class of service to VoIP streams (both data and signaling) over other ordinary traffic by classifying traffic, and enabling correct egress queue configuration</p> | |
| <p>An associated Voice VLAN can be easily configured with Auto-VoIP for further traffic isolation</p> | |
| <p>When deployed IP phones are LLDP-MED compliant, the Voice VLAN will use LLDP-MED to pass on the VLAN ID, 802.1P priority and DSCP values to the IP phones, accelerating convergent deployments</p> | |
| <p>Versatile connectivity including "PoE Passthrough"</p> | |
| <p>IEEE 802.3af Power over Ethernet (PoE) provides up to 15.4W per port (M4100-D10-POE; M4100-26-POE; M4100-50-POE; M4100-26G-POE)</p> | |
| <p>IEEE 802.3at Power over Ethernet Plus (PoE+) provides up to 30W per port (M4100-D12G-POE+; M4100-12G-POE+; M4100-24G-POE+; M4100-50G-POE+)</p> | |
| <p>Desktop versions can be powered by upstream PoE+ switch using their Port-1 (PD, PoE+ 30W): M4100-D12G and M4100-D12G-POE+</p> | |
| <p>M4100-D12G-POE+ can even redistribute PoE power from the upstream PoE+ switch to VoIP phones or other devices in meeting rooms, retail sales floors or other challenging environments without outlet</p> | |
| <p>Both IEEE 802.3at Layer 2 LLDP method and 802.3at 2-event classification methods are supported for compatibility with all PoE+ PD devices</p> | |
| <p>Automatic MDIX and Auto-negotiation on all ports select the right transmission modes (half or full duplex) as well as data transmission for crossover or straight-through cables dynamically for the admin</p> | |
| <p>100Mbps backward compatibility on all SFP ports</p> | |
| <p>IPv6 support with multicasting (MLD for IPv6 filtering), ACLs and QoS</p> | |
| <p>Tier 1 availability</p> | |
| <p>Rapid Spanning Tree (RSTP) and Multiple Spanning Tree (MSTP) allow for rapid transitioning of the ports to the Forwarding state and the suppression of Topology Change Notification</p> | |
| <p>IP address conflict detection performed by the embedded DHCP server prevents accidental IP address duplicates from perturbing the overall network stability</p> | |
| <p>Power redundancy for higher availability when mission critical, including hot-swap PSUs and Fans</p> | |
| <p>Ease of management and control</p> | |
| <p>Dual firmware image and dual configuration file for transparent firmware updates/configuration changes with minimum service interruption</p> | |
| <p>Flexible Port-Channel /LAG (802.3ad) implementation for maximum compatibility, fault tolerance and load sharing with any type of Ethernet channeling from other vendors switch, server or storage devices conforming to IEEE 802.3ad - including static (selectable hashing algorithms) or dynamic LAGs (highly tunable LACP Link Aggregation Control Protocol)</p> | |

Modern access layer features highlights

| |
|---|
| Port names feature allows for descriptive names on all interfaces and better clarity in real word admin daily tasks |
| Loopback interfaces management for routing protocols administration |
| Private VLANs and local Proxy ARP help reduce broadcast with added security |
| Management VLAN ID is user selectable for best convenience |
| Industry-standard VLAN management in the command line interface (CLI) for all common operations such as VLAN creation; VLAN names; VLAN "make static" for dynamically created VLAN by GRVP registration; VLAN trunking; VLAN participation as well as VLAN ID (PVID) and VLAN tagging for one interface, a group of interfaces or all interfaces at once |
| System defaults automatically set per-port broadcast, multicast, and unicast storm control for typical, robust protection against DoS attacks and faulty clients which can, with BYOD, often create network and performance issues |
| IP Telephony administration is simplified with consistent Voice VLAN capabilities per the industry standards and automatic functions associated |
| Comprehensive set of "system utilities" and "Clear" commands help troubleshoot connectivity issues and restore various configurations to their factory defaults for maximum admin efficiency: traceroute (to discover the routes that packets actually take when traveling on a hop-by-hop basis and with a synchronous response when initiated from the CLI), clear dynamically learned MAC addresses, counters, IGMP snooping table entries from the Multicast forwarding database etc. |
| All major centralized software distribution platforms are supported for central software upgrades and configuration files management (HTTP, TFTP), including in highly secured versions (HTTPS, SFTP, SCP) |
| Simple Network Time Protocol (SNTP) can be used to synchronize network resources and for adaptation of NTP, and can provide synchronized network timestamp either in broadcast or unicast mode (SNTP client implemented over UDP - port 123) |
| Embedded RMON (4 groups) and sFlow agents permit external network traffic analysis |
| Engineered for convergence |
| Audio (Voice over IP) and Video (multicasting) comprehensive switching, filtering, routing and prioritization |
| Auto-VoIP, Voice VLAN and LLDP-MED support for IP phones QoS and VLAN configuration |
| IGMP Snooping for IPv4, MLD Snooping for IPv6 and Querier mode facilitate fast receivers joins and leaves for multicast streams and ensure multicast traffic only reaches interested receivers without the need of a Multicast router |
| Multicast VLAN Registration (MVR) uses a dedicated Multicast VLAN to forward multicast streams and avoid duplication for clients in different VLANs |
| Schedule enablement |
| Enterprise security |
| Traffic control MAC Filter and Port Security help restrict the traffic allowed into and out of specified ports or interfaces in the system in order to increase overall security and block MAC address flooding issues |
| DHCP Snooping monitors DHCP traffic between DHCP clients and DHCP servers to filter harmful DHCP message and builds a bindings database of (MAC address, IP address, VLAN ID, port) tuples that are considered authorized in order to prevent DHCP server spoofing attacks |
| IP source guard and Dynamic ARP Inspection use the DHCP snooping bindings database per port and per VLAN to drop incoming packets that do not match any binding and to enforce source IP / MAC addresses for malicious users traffic elimination |
| Layer 2/Layer 3-v4/Layer 3-v6/Layer 4 Access Control Lists (ACLs) can be binded to ports, Layer 2 interfaces, VLANs and LAGs (Link Aggregation Groups or Port channel) for fast unauthorized data prevention and right granularity |
| Bridge protocol data unit (BPDU) Guard allows the network administrator to enforce the Spanning Tree (STP) domain borders and keep the active topology consistent and predictable - unauthorized devices or switches behind the edge ports that have BPDU enabled will not be able to influence the overall STP topology by creating loops |
| Spanning Tree Root Guard (STRG) enforces the Layer 2 network topology by preventing rogue root bridges potential issues when for instance, unauthorized or unexpected new equipment in the network may accidentally become a root bridge for a given VLAN |

Modern access layer features highlights

| | |
|--|--|
| Dynamic 802.1x VLAN assignment mode, including Dynamic VLAN creation mode and Guest VLAN/ Unauthenticated VLAN are supported for rigorous user and equipment RADIUS policy server enforcement | <ul style="list-style-type: none"> Up to 48 clients (802.1x) per port are supported, including the authentication of the users domain, in order to facilitate convergent deployments: for instance when IP phones connect PCs on their bridge, IP phones and PCs can authenticate on the same switch port but under different VLAN assignment policies (Voice VLAN versus data VLAN) |
| 802.1x MAC Address Authentication Bypass (MAB) is an alternative method for non-Radius clients | <ul style="list-style-type: none"> A list of authorized MAC addresses of client NICs is maintained on the RADIUS server for MAB purpose MAB can be configured on a per-port basis on the switch MAB initiates only after the dot1x authentication process times out, and only when clients don't respond to any of the EAPOL packets sent by the switch When 802.1x unaware clients try to connect, the switch sends the MAC address of each client to the authentication server The RADIUS server checks the MAC address of the client NIC against the list of authorized addresses The RADIUS server returns the access policy and VLAN assignment to the switch for each client |
| Double VLANs (DVLAN - QoQ) pass traffic from one customer domain to another through the "metro core" in a multi-tenancy environment: customer VLAN IDs are preserved and a service provider VLAN ID is added to the traffic so the traffic can pass the metro core in a simple, secure manner | |
| Private VLANs (with Primary VLAN, Isolated VLAN, Community VLAN, Promiscuous port, Host port, Trunks) provide Layer 2 isolation between ports that share the same broadcast domain, allowing a VLAN broadcast domain to be partitioned into smaller point-to-multipoint subdomains across switches in the same Layer 2 network | <ul style="list-style-type: none"> Private VLANs are useful in DMZ when servers are not supposed to communicate with each other but need to communicate with a router; they remove the need for more complex port-based VLANs with respective IP interface/subnets and associated L3 routing Another Private VLANs typical application are carrier-class deployments when users shouldn't see, snoop or attack other users' traffic |
| Secure Shell (SSH) and SNMPv3 (with or without MD5 or SHA authentication) ensure SNMP and Telnet sessions are secured | |
| TACACS+ and RADIUS enhanced administrator management provides strict "Login" and "Enable" authentication enforcement for the switch configuration, based on latest industry standards: exec authorization using TACACS+ or RADIUS; command authorization using TACACS+ and RADIUS Server; user exec accounting for HTTP and HTTPS using TACACS+ or RADIUS; and authentication based on user domain in addition to user ID and password | |
| Superior quality of service | |
| Advanced classifier-based hardware implementation for Layer 2 (MAC), Layer 3 (IP) and Layer 4 (UDP/TCP transport ports) prioritization | |
| 8 queues for priorities and various QoS policies based on 802.1p (CoS) and DiffServ can be applied to interfaces and VLANs | |
| Advanced rate limiting down to 1 Kbps granularity and minimum-guaranteed bandwidth can be associated with ACLs for best granularity | |
| Automatic Voice over IP prioritization with Auto-VoIP | |
| Flow Control | |
| 802.3x Flow Control implementation per IEEE 802.3 Annex 31 B specifications with Symmetric flow control, Asymmetric flow control or No flow control | <p>Asymmetric flow control allows the switch to respond to received PAUSE frames, but the ports cannot generate PAUSE frames</p> <p>Symmetric flow control allows the switch to both respond to, and generate MAC control PAUSE frames</p> |
| Allows traffic from one device to be throttled for a specified period of time: a device that wishes to inhibit transmission of data frames from another device on the LAN transmits a PAUSE frame | |




Target Application

Why M4100 series for the edge of small enterprise networks?

Because the M4100 series offers up to 3x better value:

- Combining superior resiliency and advanced security, NETGEAR Intelligent Edge managed switches feature comprehensive Layer 2, Lite Layer 3 and Layer 4 switching; including fiber aggregation capabilities. Unlike other 'cost conscious' products from competitors, the NETGEAR Intelligent Edge series has been designed from the ground up for organizations requiring intelligence at the network edge.
- Affordable and reliable, these access layer switches win as a proficient component of secure, converged voice, video and data networking solutions.

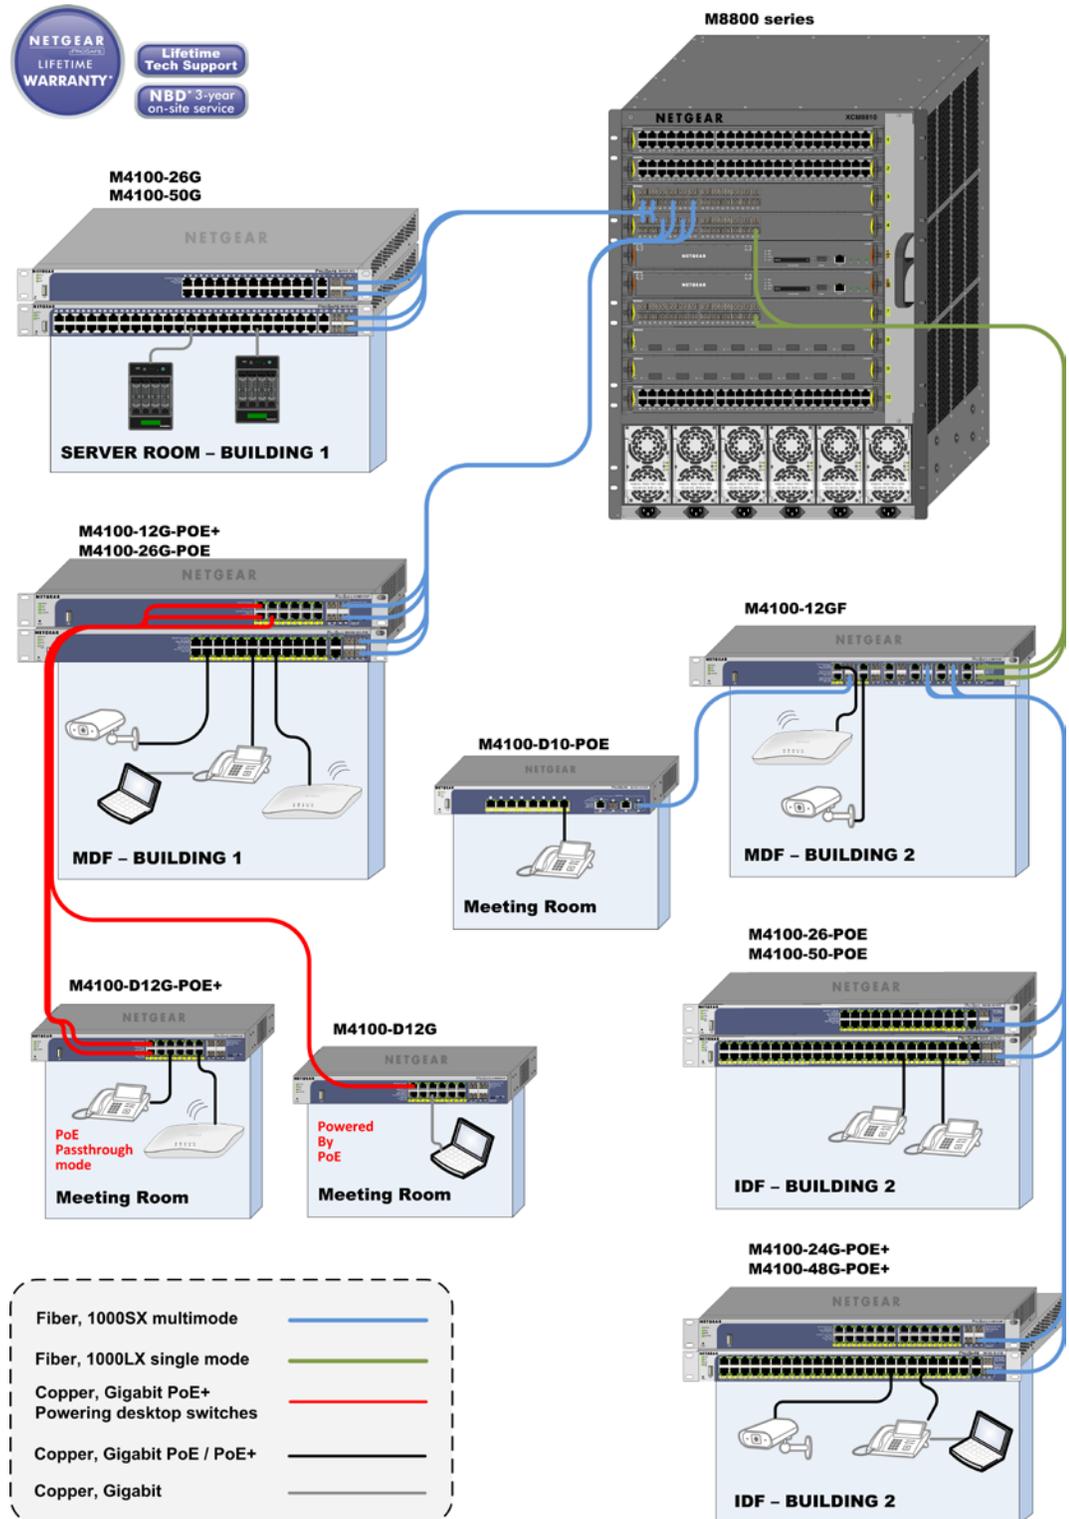

Three Reasons to Get Started Today with the NETGEAR M4100 series

1. Versatile, Protected and Expendable Power

The M4100 series are the first affordable managed switches with both redundant and external power supply capabilities – key for critical applications such as VoIP, IP surveillance and Wireless access points. PoE devices gobble increasing amounts of PoE power, yet existing SMB switching solutions from other vendors don't scale to full power. Although most servers in SMB networks have dual power supplies, switches in SMB networks have not – until now.

Select desktop switches in the M4100 series can be powered by PoE as a cost-effective solution when there is no existing electrical wiring or power outlets, as the switch can draw power directly from the wiring closet. The flexibility of a PoE switch is also convenient for meeting rooms and open spaces where visible electrical wiring is unsightly or impractical. One PoE+ downlink (30W) from the upstream switch is sufficient for the standard operation of the M4100-D12G and M4100-D12G-POE+ switches. This also increases resiliency for critical installations: the Power over Ethernet PD connection on these switches also doubles as a redundant power supply (RPS) should the switch be locally powered.

Innovative PoE passthrough technology even lets M4100-D12G-POE+ power local PoE PD devices – redistributing PoE budget from the upstream switch. Up to 25W of power can be available for local PD devices – extending the reach of PoE deployments beyond the 100-meter or 328-foot bar: the M4100-D12G-POE+ can function as a "PoE repeater" for powering remote IP cameras, Wireless access points, etc.

For all other rackmount Power over Ethernet models in the NETGEAR Intelligent Edge M4100 series, in addition to their built-in PSU providing more PoE power than competitive solutions at a similar price point, the NETGEAR Intelligent Edge M4100 series is the only one allowing for an additional PoE power "upgrade" via external power supply; immediately or at later times.

Short story, all rackmount switches in the NETGEAR M4100 series are either PoE Full Power capable already or PoE Full Power capable when drawing external power from the RPS4000. All 24-port and 48-port models can scale up to 802.3af PoE full power or 802.3at PoE+ full power simultaneously for all ports. This is real investment protection.

2. Security and Control

Enhanced security includes network access control and isolation for improved convergence of voice, video and data: dynamic 802.1x VLAN assignment mode, including Dynamic VLAN creation mode and Guest VLAN / Unauthenticated VLAN are supported for rigorous user and equipment policy enforcement from a RADIUS server. The RADIUS server can also be the Network Policy Server (NPS) in Microsoft® Windows Server™ 2008 or 2012, when in an Active Directory domain.

Up to 48 clients (802.1x) per port are supported, including the authentication of a user's domain, in order to facilitate convergent deployments. When IP phones connect PCs on their bridge, IP phones and PCs authenticate on the same switch port but under different VLAN assignment policies (Voice VLAN versus data VLAN) – providing administrators with greater flexibility during deployment and policy enforcement.

For 802.1x unaware clients, 802.1x MAC Address Authentication Bypass (MAB) is a great alternative: when 802.1x unaware clients try to connect, the switch sends their MAC addresses to the authentication server. When checked, the RADIUS server returns the access policy and VLAN assignment to the switch for each client.

Enhanced security also includes better network isolation with Private VLANs, providing Layer 2 isolation between ports that share the same broadcast domain. A VLAN broadcast domain can be partitioned into smaller point-to-multipoint subdomains across switches in the same Layer 2 network. This is useful for IP camera deployments, or in the DMZ when servers are not supposed to communicate with each other but need to communicate with a router. Private VLANs remove the need for more complex port-based VLANs with respective IP interface/subnets and associated L3 routing.

3. Reliability

Learn how the NETGEAR M4100 series delivers more for less: all models provide much longer MTBF (average lifetime) thanks to better/higher quality components and circuitry.

For instance, the desktop 8-port PoE Fast Ethernet M4100-D10-POE (FSM5210P) is predicted to have an average mean time between failure of 579,985 hours, or 66 years at an ambient standard 25°C temperature (77°F). The rackmount 24-port PoE Gigabit Ethernet M4100-26G-POE (GSM7226LP) is predicted to have an average mean time between failure of 437,199 hours, more than 49 years. This is nearly double the reliability of the closest competitive solutions in this price band.

Conclusion

The M4100 series delivers an unbeatable combination of performance, security and convergence for voice, video and data networking solutions.

Due to the wide adoption of virtualization, the convergence of voice, video, and data and the rapid proliferation of bandwidth-intensive applications, small and mid-sized businesses, hospitals and schools today have security, control and reliability needs similar to those of large enterprises. For approximately the same price as low-end solutions currently on the market aimed at SMBs, NETGEAR is offering high-end features that have so far been reserved only for enterprise-class offerings available at double or triple the price point.

Accessories

RPS4000

RPS/EPS unit for up to 4 concurrent switches

Ordering information

- Americas, Europe: RPS4000-100NES
- Asia Pacific: RPS4000-100AJS
- Warranty: 5 years

- RPS mode: provide power backup for up to four switches concurrently
 - With same level of protection as with four dedicated, “one-to-one” RPS units
- EPS mode: provide supplemental PoE power up to four switches concurrently
 - Up to 2,880W shared PoE+ budget
 - When in EPS mode, RPS4000 supersedes each switch main PSU
 - Switch main PSU system power reverts to redundant power supply (RPS) function



Front view

- RPS4000 is 1RU unit with four (4) empty slots
- Power modules (APS1000W) are sold separately
- APS1000W requirement depends on RPS, EPS, PoE application

Rear view

- Four (4) embedded RPS connectors
- Switch selectors for RPS/EPS power modes
- Switch selectors for power modules two-by-two bridging

Included:


- Four (4) RPS cables – 60cm each (~2 ft)
- Rack mount kit
- Power cord

The RPS4000 RPS/EPS unit supports the following key features:

- The RPS4000 can be connected to a maximum of four switches (any combination of M5300 series switches is supported) using RPS switch connectors and RPS cables
- The RPS4000 provides protection against electrical issues such as high-voltage (input, output) or short circuits for maximum security
- The RPS4000 can accommodate up to four hot-swap APS1000W power modules
 - Either one, two, three or four APS1000W power modules are required, depending on RPS or EPS application (see combinations in “Number of APS1000W” table)
- In RPS mode with only one APS1000W power module, RPS4000 can protect up to four (4) non-PoE or PoE M4100 series switches
 - In case of a general switches power feed failure, powering all four switches simultaneously for 12V DC system power
 - RPS4000 takes over and delivers adequate power without any service interruption (continuous monitoring)
 - When the switch internal power is restored, the RPS4000 stops supplying power to the switch automatically, again without any service interruption
- In RPS mode with multiple APS1000W power module combinations, RPS4000 can protect up to four (4) PoE M4100 series switches
 - In case of a general switches power feed failure, powering all four switches simultaneously (12V DC system power and -56V DC PoE)
 - Same RPS functionality as with non-PoE switches including PoE power budget protection
- In EPS mode with multiple APS1000W power module combinations, RPS4000 allows for various PoE 802.3af and 802.3at “full power” applications
 - Supports M4100-50-POE, M4100-26G-POE; M4100-24G-POE+ and M4100-50G-POE+
 - Superseding switches main PSU for PoE budget and switch powering
 - Delivering -56V DC for PoE power and 12V for switch power
 - Switch main PSU system acts as built-in RPS for both switch power and PoE budget protection
- In EPS mode, power slots can be organized into groups of two (Group 1 and Group 2) allowing for APS1000W power modules bridging
 - Two APS1000W power modules can be bridged and deliver 1,440W PoE budget to one 48-port switch M4100-50G-POE+
- Power slots can be configured for RPS or EPS mode
 - All four power slots can be combined together with only one APS1000W power module for four (4) 12V switches RPS application
 - Power slots can be utilized in one-to-one mode for PoE switches RPS applications
 - Power slots can be bridged two by two for PoE switches EPS applications

Accessories

| Number of APS1000W | 1 POWER MODULE | 2 POWER MODULES | 3 POWER MODULES | 4 POWER MODULES |
|--|---|---|--|---|
| RPS mode (Redundant Power Supply) | <p>Up to 4 switches (non-PoE versions)</p> <p>M4100-26G or M4100-50G or M4100-12GF</p> <p>Complete protection 12V system power</p> <p>Or:</p> <p>Up to 4 switches (PoE versions) but only for 12V system power, not PoE</p> <p>M4100-26-POE or M4100-50-POE</p> <p>M4100-12GF when PoE+ ports are used</p> <p>M4100-26G-POE or M4100-12G-POE+</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> | <p>2 switches (PoE versions)</p> <p>M4100-26-POE or M4100-50-POE</p> <p>M4100-12GF when PoE+ ports are used</p> <p>M4100-26G-POE or M4100-12G-POE+</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> <p>Complete protection 12V system power and -56V PoE power</p> | <p>3 switches (PoE versions)</p> <p>M4100-26-POE or M4100- 50-POE</p> <p>M4100-12GF when PoE+ ports are used</p> <p>M4100-26G-POE or M4100-12G-POE+</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> <p>Complete protection 12V system power and -56V PoE power</p> | <p>4 switches (PoE versions)</p> <p>M4100-26-POE or M4100-50-POE</p> <p>M4100-12GF when PoE+ ports are used</p> <p>M4100-26G-POE or M4100-12G-POE+</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> <p>Complete protection 12V system power and -56V PoE power</p> |
| EPS mode (External Power Supply) | <p>720W PoE budget available (total) for up to 2 switches (PoE versions)</p> <p>M4100-50-POE or M4100-26G-POE</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> | <p>1,440W PoE budget available (total) for up to 4 switches (PoE versions)</p> <p>M4100-50-POE or M4100-26G-POE</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> | <p>2,160W PoE budget available (total) for up to 4 switches (PoE versions)</p> <p>M4100-50-POE or M4100-26G-POE</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> | <p>2,880W PoE budget available (total) for up to 4 switches (PoE versions)</p> <p>M4100-50-POE or M4100-26G-POE</p> <p>M4100-24G-POE+ or M4100-50G-POE+</p> |
| Example for PoE applications: (802.3af full power) | <p>One M4100-50-POE providing 720W</p> <p>46 ports full power 802.3af PoE</p> | <p>Two M4100-50-POE providing 720W each</p> <p>96 ports full power 802.3af PoE</p> | <p>Three M4100-50-POE providing 720W each</p> <p>138 ports full power 802.3af PoE</p> | <p>Four M4100-50-POE providing 720W each</p> <p>192 ports full power 802.3af PoE</p> |
| Example for PoE+ applications: (802.3at full power) | <p>One M4100-24G-POE+ providing 720W</p> <p>24 ports full power 802.3at PoE+</p> | <p>One M4100-50G-POE+ providing 1,440W</p> <p>48 ports full power 802.3at PoE+</p> | <p>One M4100-24G-POE+ providing 720W</p> <p>One M4100-50G-POE+ providing 1,440W</p> <p>72 ports full power 802.3at PoE+</p> | <p>Two M4100-50G-POE+ providing 1,440W each</p> <p>96 ports full power 802.3at PoE+</p> |

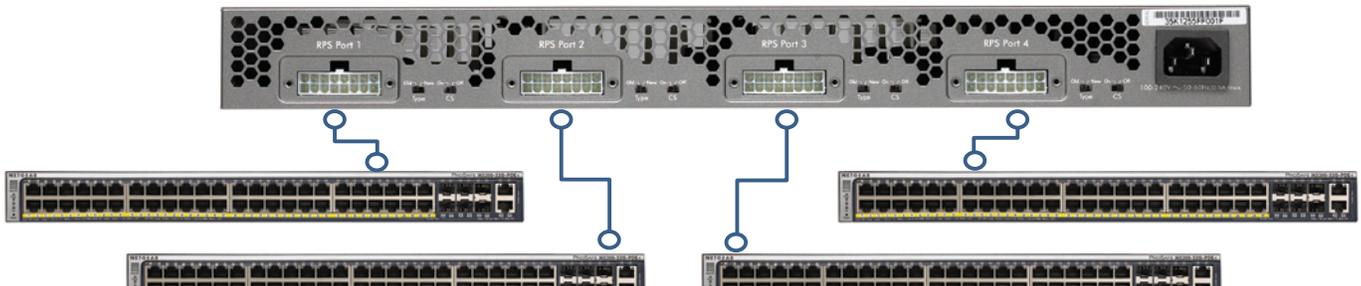

Accessories

APS1000W Power Module for RPS4000

Ordering information

- Americas, Europe:
APS1000W-100NES
- Asia Pacific: APS1000W-100AJS
- Warranty: 5 years



Capacity:

- 110V–240V AC power input
- Up to 960W DC 12V output power for up to 4 switches (RPS)
- Up to 720W DC -56V PoE budget output power for up to 2 PoE switches (EPS)



Inserting one APS1000W in RPS4000 power slot #1 (front view)

RPS4000 equipped with 4 APS1000W power modules (front view)

RPS5412 RPS unit for 1 switch by Optimal Power®

Ordering information

- Americas: RPS5412-100NAS
- Europe: RPS5412-100EUS
- Asia Pacific: RPS5412-100AJS
- Warranty: 3 years



- Optimal Power® RPS unit certified by NETGEAR for M4100 series
- Includes the RPS cable for the switch RPS connector
- Provides seamless “one-to-one” redundant power to the Switch
- 56V DC power limited to 308W (maximum PoE budget)

420-10043-01 Rack mount kit for M4100 series desktop versions

Ordering information

- Worldwide: 420-10043-01
- Warranty: 5 years



- M4100 series desktop switches come with wall mount kit only
- This optional rack mount kit contains two brackets for standard 19” rack mount
- Compatible with:
 - M4100-D10-POE (FSM5210P)
 - M4100-D12G (GSM5212)
 - M4100-D12G-POE+ (GSM5212P)

Accessories

GBIC SFP Optics for M4100 series

| ORDERING INFORMATION WORLDWIDE: SEE TABLE BELOW WARRANTY: 5 YEARS | Multimode Fiber (MMF) | | Single mode Fiber (SMF) |
|--|---|---|---|
| | OM1 or OM2 62.5/125µm | OM3 50/125µm | 9/125µm |
| <p>Gigabit SFP</p>  <p>• Fits into M4100 series SFP interfaces (front)</p> | <p>AGM731F</p> <p>1000Base-SX short range multimode LC duplex connector up to 275m (902 ft)</p> <p>AGM731F (1 unit)</p> | <p>AGM731F</p> <p>1000Base-SX short range multimode LC duplex connector up to 550m (1,804 ft)</p> <p>AGM731F (1 unit)</p> | <p>AGM732F</p> <p>1000Base-LX long range single mode LC duplex connector up to 10km (6.2 miles)</p> <p>AGM732F (1 unit)</p> |
| <p>Fast Ethernet SFP</p>  <p>• Fits into M4100 series SFP interfaces (front)</p> | <p>AFM735</p> <p>100Base-FX IEEE 802.3 LC duplex connector up to 2km (1.24 miles)</p> <p>AFM735-10000S (1 unit)</p> | <p>AFM735</p> <p>100Base-FX IEEE 802.3 LC duplex connector up to 2km (1.24 miles)</p> <p>AFM735-10000S (1 unit)</p> | |

Technical Specifications

- Requirements based on 10.x software release
- Layer 2+ package includes Layer 3 static routing



| Model Name | Description | Model number |
|-----------------|--|---------------|
| M4100-D10 POE | Desktop 8 ports Fast Ethernet PoE 802.3af, Layer 2+ software package | FSM5210P |
| M4100-26-POE | 24 ports Fast Ethernet PoE 802.3af, Layer 2+ software package | FSM7226P |
| M4100-50-POE | 48 ports Fast Ethernet PoE 802.3af, Layer 2+ software package | FSM7250P |
| M4100-D12G | Desktop 12 ports Gigabit, Layer 2+ software package | GSM5212 |
| M4100-D12G-POE+ | Desktop 12 ports Gigabit PoE+ 802.3at, Layer 2+ software package | GSM5212P v1h2 |
| M4100-12GF | 12 ports Gigabit Fiber, Layer 2+ software package | GSM7212F v1h2 |
| M4100-12G-POE+ | 12 ports Gigabit PoE+ 802.3at, Layer 2+ software package | GSM7212P v1h2 |
| M4100-26G | 26 ports Gigabit, Layer 2+ software package | GSM7224 v2h2 |
| M4100-50G | 50 ports Gigabit, Layer 2+ software package | GSM7248 v2h2 |
| M4100-26G-POE | 24 ports Gigabit PoE 802.3af, Layer 2+ software package | GSM7226LP |
| M4100-24G-POE+ | 24 ports Gigabit PoE+ 802.3at, Layer 2+ software package | GSM7224P v1h2 |
| M4100-50G-POE+ | 48 ports Gigabit PoE+ 802.3at, Layer 2+ software package | GSM7248P |

TECHNICAL SPECIFICATIONS

PHYSICAL INTERFACES

| Front | Auto-sensing RJ45 10/100 | Auto-sensing RJ45 10/100/1000 | Auto-sensing SFP ports 100/1000Base-X | Console port (selectable) | Storage Port |
|-----------------|--------------------------|-------------------------------|---------------------------------------|---------------------------|--|
| M4100-D10-POE | 8 | 2 | 2 (shared) | - | 1 x USB Firmware, Configuration Files |
| M4100-26-POE | 24 | 2 | 2 (shared) | - | |
| M4100-50-POE | 48 | 2 | 2 (shared) | - | |
| M4100-D12G | - | 12 | 2 (shared) | - | |
| M4100-D12G-POE+ | - | 12 | 4 (shared) | Mini-USB | |
| M4100-12GF | - | 12 | 12 (shared) | Mini-USB | |
| M4100-12G-POE+ | - | 12 | 4 (shared) | Mini-USB | |
| M4100-26G | - | 26 | 4 (shared) | - | |
| M4100-50G | - | 50 | 4 (shared) | - | |
| M4100-26G-POE | - | 26 | 4 (shared) | - | |
| M4100-24G-POE+ | - | 24 | 4 (shared) | Mini-USB | |
| M4100-50G-POE+ | - | 50 | 4 (shared) | - | |

M4100 series

| Rear | Power Supply | RPS/EPs connector | Console port (selectable) | Physical security |
|-------------------------|----------------------|-------------------|----------------------------|------------------------|
| M4100-D10-POE | External | - | Serial RS232 DB9, Mini-USB | 1 Kensington Lock Slot |
| M4100-26-POE | Fixed, internal | 1 | Serial RS232 DB9, Mini-USB | |
| M4100-50-POE | Fixed, internal | 1 | Serial RS232 DB9, Mini-USB | |
| M4100-D12G | External | - | Serial RS232 DB9, Mini-USB | |
| M4100-D12G-POE+ | Fixed, internal | - | Serial RS232 DB9 | |
| M4100-12GF | Fixed, internal | 1 | Serial RS232 DB9 | |
| M4100-12G-POE+ | Fixed, internal | 1 | Serial RS232 DB9 | |
| M4100-26G | Fixed, internal | 1 | Serial RS232 DB9, Mini-USB | |
| M4100-50G | Fixed, internal | 1 | Serial RS232 DB9, Mini-USB | |
| M4100-26G-POE | Fixed, internal | 1 | Serial RS232 DB9, Mini-USB | |
| M4100-24G-POE+ | Fixed, internal | 1 | Serial RS232 DB9 | |
| M4100-50G-POE+ | Fixed, internal | 1 | Serial RS232 DB9, Mini-USB | |
| Total Port Count | Fast Ethernet | Gigabit | | |
| M4100-D10-POE | 8 ports total | 2 ports total | | |
| M4100-26-POE | 24 ports total | 2 ports total | | |
| M4100-50-POE | 48 ports total | 2 ports total | | |
| M4100-D12G | - | 12 ports total | | |
| M4100-D12G-POE+ | - | 12 ports total | | |
| M4100-12GF | - | 12 ports total | | |
| M4100-12G-POE+ | - | 12 ports total | | |
| M4100-26G | - | 26 ports total | | |
| M4100-50G | - | 50 ports total | | |
| M4100-26G-POE | - | 26 ports total | | |
| M4100-24G-POE+ | - | 24 ports total | | |
| M4100-50G-POE+ | - | 50 ports total | | |

| Power over Ethernet | | | | |
|--|---|--------------------|---|---------------------------|
| PSE Capacity | PoE ports 802.3af | PoE+ ports 802.3at | Internal PoE budget | PoE budget with EPS |
| M4100-D10-POE | 8 | - | 66W | - |
| M4100-26-POE | 24 | - | 380W | - |
| M4100-50-POE | 48 | - | 380W | 740W with EPS (RPS4000) |
| M4100-D12G-POE+ | - | 10 | 120W when AC power | - |
| M4100-12GF | - | 4 | 150W | - |
| M4100-12G-POE+ | - | 12 | 380W | - |
| M4100-26G-POE | 24 | - | 192W | 380W with EPS (RPS4000) |
| M4100-24G-POE+ | - | 24 | 380W | 720W with EPS (RPS4000) |
| M4100-50G-POE+ | - | 48 | 380W | 1,440W with EPS (RPS4000) |
| PD Capacity | Powered by PoE+ | | PoE "Passthrough" Technology | |
| M4100-D12G | Yes with one link PoE+ 30W (PD Port 1) | | | |
| M4100-D12G-POE+ | Yes with one link PoE+ 30W (PD Port 1) | | Yes when second link PoE+ 30W (PD Port 2): 25W PoE budget can be redistributed by Port 3-12 | |
| Features Support | | | | |
| IEEE 802.3af (up to 15.4W per port) | Yes (M4100-D10-POE ; M4100-26-POE ; M4100-50-POE ; M4100-26G-POE) | | | |
| IEEE 802.3at (up to 30W per port) | Yes (M4100-D12G-POE+ ; M4100-12GF ; M4100-12G-POE+ ; M4100-24G-POE+ ; M4100-50G-POE+) | | | |
| IEEE 802.3at Layer 2 (LLDP) method | Yes (M4100-D12G-POE+ ; M4100-12GF ; M4100-12G-POE+ ; M4100-24G-POE+ ; M4100-50G-POE+) | | | |
| IEEE 802.3at 2-event classification | Yes (M4100-D12G-POE+ ; M4100-12GF ; M4100-12G-POE+ ; M4100-24G-POE+ ; M4100-50G-POE+) | | | |
| PoE timer / schedule (week, days, hours) | Yes for all 802.3af and 802.3at models | | Convenient for Wireless Access Points schedules | |
| Processor/Memory | | | | |
| Processor (CPU) | Broadcom BCM53003 @ 600MHz | | | |
| System memory (RAM) | 128 MB | | | |
| Code storage (flash) | 32 MB | | Dual firmware image, dual configuration file | |
| Packet Buffer Memory | | | | |
| All models | 12 Mb | | Dynamically shared across only used ports | |

| Performance Summary | | |
|---------------------------------|---|--|
| Switching fabric | | |
| M4100-D10-POE | 5.6 Gbps | Line-rate (non blocking fabric) |
| M4100-26-POE | 8.8 Gbps | |
| M4100-50-POE | 13.6 Gbps | |
| M4100-D12G | 24 Gbps | |
| M4100-D12G-POE+ | 24 Gbps | |
| M4100-12GF | 24 Gbps | |
| M4100-12G-POE+ | 24 Gbps | |
| M4100-26G | 52 Gbps | |
| M4100-50G | 100 Gbps | |
| M4100-26G-POE | 52 Gbps | |
| M4100-24G-POE+ | 48 Gbps | |
| M4100-50G-POE+ | 100 Gbps | |
| Throughput | | |
| M4100-D10-POE | 4.167 Mpps | High Performance Layer 2 switching / Layer 3 routing in hardware |
| M4100-26-POE | 6.548 Mpps | |
| M4100-50-POE | 10.119 Mpps | |
| M4100-D12G | 17.857 Mpps | |
| M4100-D12G-POE+ | 17.857 Mpps | |
| M4100-12GF | 17.857 Mpps | |
| M4100-12G-POE+ | 17.857 Mpps | |
| M4100-26G | 38.690 Mpps | |
| M4100-50G | 74.405 Mpps | |
| M4100-26G-POE | 38.690 Mpps | |
| M4100-24G-POE+ | 35.714 Mpps | |
| M4100-50G-POE+ | 74.405 Mpps | |
| Green Ethernet | | |
| Energy Efficient Ethernet (EEE) | IEEE 802.3az Energy Efficient Ethernet Task Force compliance (M4100-D12G; M4100-26G; M4100-50G; M4100-26G-POE; M4100-50G-POE+) | |
| Energy Detect Mode | Unused ports automatic power off (M4100-D10-POE; M4100-26-POE; M4100-50-POE; M4100-D12G-POE+; M4100-12GF; M4100-12G-POE+; M4100-24G-POE+) | |
| Other Metrics | | |
| Forwarding mode | Store-and-forward | |

| | | |
|--|--|-------------------|
| Latency (64-byte frames, 100 Mbps, Copper) | <10.194 µs | |
| Latency (64-byte frames, 1 Gbps, Copper) | <3.91 µs | |
| Addressing | 48-bit MAC address | |
| Address database size | 16,000 MAC addresses | |
| Number of VLANs | 1,024 VLANs (802.1Q) simultaneously | |
| Number of multicast groups filtered (IGMP) | 1K | |
| Number of Link Aggregation Groups (LAGs - 802.3ad) | 12 LAGs with up to 8 ports per group | |
| Number of hardware queues for QoS | 8 queues | |
| Number of static routes (IPv4) | 64 | |
| Number of IP interfaces (port or VLAN) | 64 | |
| Jumbo frame support | up to 9K packet size | |
| Acoustic noise (ANSI-S10.12) @ 25 °C ambient (77 °F) | | |
| M4100-D10-POE | 0 dB (fanless) | Fan speed control |
| M4100-26-POE | <37.3 dB | |
| M4100-50-POE | <38.9 dB | |
| M4100-D12G | 0 dB (fanless) | |
| M4100-D12G-POE+ | <19.8 dB below typical acoustic office ambient | |
| M4100-12GF | <30 dB | |
| M4100-12G-POE+ | <35.8 dB | |
| M4100-26G | <35.6 dB | |
| M4100-50G | <37.2dB | |
| M4100-26G-POE | <36.6 dB | |
| M4100-24G-POE+ | <33.8 dB | |
| M4100-50G-POE+ | <47.7 dB | |
| Heat Dissipation (BTU) (Maximum) | | |
| M4100-D10-POE | 298 Btu/hr | |
| M4100-26-POE | 1,558 Btu/hr | |
| M4100-50-POE | 1,661 Btu/hr | |
| M4100-D12G | 64 Btu/hr | |
| M4100-D12G-POE+ | 569 Btu/hr | |
| M4100-12GF | 548 Btu/hr | |
| M4100-12G-POE+ | 1,543 Btu/hr | |
| M4100-26G | 108 Btu/hr | |

M4100 series

| | | |
|---|-----------------------------|--|
| M4100-50G | | 169 Btu/hr |
| M4100-26G-POE | | 932 Btu/hr |
| M4100-24G-POE+ | | 1,820 Btu/hr |
| M4100-50G-POE+ | | 1,896 Btu/hr |
| Mean Time Between Failures (MTBF) | @ 25 °C ambient (77 °F) | @ 55 °C ambient (131 °F) |
| M4100-D10-POE | 579,985 hours (~66.2 years) | 102,891 hours (~11.7 years) |
| M4100-26-POE | 242,281 hours (~27.7 years) | 75,395 hours (~8.6 years) |
| M4100-50-POE | 163,019 hours (~18.6 years) | 49,668 hours (~5.7 years) |
| M4100-D12G | 214,142 hours (~24.4 years) | 67,633 hours (~7.7 years) |
| M4100-D12G-POE+ | 766,618 hours (~87.5 years) | 99,094 hours (~11.3 years) |
| M4100-12GF | 670,956 hours (~76.6 years) | 190,562 hours (~21.8 years) |
| M4100-12G-POE+ | 422,436 hours (~48.2 years) | 108,016 hours (~12.3 years) |
| M4100-26G | 702,785 hours (~80.2 years) | 197,792 hours (~22.6 years) |
| M4100-50G | 489,311 hours (~55.9 years) | 152,639 hours (~17.4 years) |
| M4100-26G-POE | 437,199 hours (~49.9 years) | 117,763 hours (~13.4 years) |
| M4100-24G-POE+ | 394,619 hours (~45.0 years) | 106,405 hours (~12.1 years) |
| M4100-50G-POE+ | 239,298 hours (~27.3 years) | 65,978 hours (~7.5 years) |
| L2 Services - VLANs | | |
| IEEE 802.1Q VLAN Tagging | Yes | Up to 1,024 VLANs - 802.1Q Tagging |
| Protocol Based VLANs | Yes | |
| IP subnet | Yes | |
| ARP | Yes | |
| IPX | Yes | |
| Subnet based VLANs | Yes | |
| MAC based VLANs | Yes | |
| Voice VLAN | Yes | |
| Private Edge VLAN | Yes | |
| Private VLAN | Yes | |
| IEEE 802.1x | Yes | |
| Guest VLAN | Yes | |
| RADIUS based VLAN assignment via .1x | Yes | |
| RADIUS based Filter ID assignment via .1x | Yes | |
| MAC-based .1x | Yes | |
| Unauthenticated VLAN | Yes | |
| Double VLAN Tagging (QoQ) | Yes | |
| Enabling dvlan-tunnel makes interface | Yes | |
| Global ethertype (TPID) | Yes | |
| Interface ethertype (TPID) | Yes | |
| Customer ID using PVID | Yes | |
| | | IP phones and PCs can authenticate on the same port but under different VLAN assignment policies |

M4100 series

| | | |
|---|-------------------|---|
| GARP with GVRP/GMRP | Yes | Automatic registration for membership in VLANs or in multicast groups |
| MVR (Multicast VLAN registration) | Yes | |
| L2 Services - Availability | | |
| IEEE 802.3ad - LAGs LACP Static LAGs | Yes Yes Yes | Up to 12 LAGs and up to 8 physical ports per LAG |
| LAG Hashing | Yes | |
| Storm Control | Yes | |
| IEEE 802.3x (Full Duplex and flow control) Per port Flow Control | Yes Yes | Asymmetric and Symmetric Flow Control |
| IEEE 802.1D Spanning Tree Protocol | Yes | |
| IEEE 802.1w Rapid Spanning Tree | Yes | |
| IEEE 802.1s Multiple Spanning Tree | Yes | |
| STP Loop Guard | Yes | |
| STP Root Guard | Yes | |
| BPDU Guard | Yes | |
| L2 Services - Multicast Filtering | | |
| IGMPv2 Snooping Support | Yes | |
| IGMPv3 Snooping Support | Yes | |
| MLDv1 Snooping Support | Yes | |
| MLDv2 Snooping Support | Yes | |
| Expedited Leave function | Yes | |
| Static L2 Multicast Filtering | Yes | |
| IGMP Snooping Enable IGMP Snooping per VLAN Snooping Querier | Yes | |
| MLD Querier | Yes | |
| Multicast VLAN registration (MVR) | Yes | |
| L3 Services - DHCP | | |
| DHCP IPv4 / DHCP IPv6 Client | Yes | |
| DHCP IPv4 Server | Yes | |
| DHCP Snooping IPv4 | Yes | |
| DHCP Relay IPv4 | Yes | |
| DHCP BootP IPv4 | Yes | |

| | | |
|--|---|--|
| Auto Install (DHCP options 66, 67, 150) | Yes | |
| L3 Services - IPv4 Routing | | |
| Static Routing | Yes | |
| Port Based Routing | Yes | |
| VLAN Routing | Yes | |
| 802.3ad (LAG) for router ports | Yes | |
| IP Helper | Yes | |
| Max IP Helper entries | 512 | |
| IP Source Guard | Yes | |
| ECMP | Yes | |
| Proxy ARP | Yes | |
| Multinetting | Yes | |
| ICMP redirect detection in hardware | Yes | |
| DNSv4 | Yes | |
| Network Monitoring and Discovery Services | | |
| ISDP (Industry Standard Discovery Protocol) | Yes | inter-operates with devices running CDP |
| 802.1ab LLDP | Yes | |
| 802.1ab LLDP - MED | Yes | |
| SNMP | V1, V2, V3 | |
| RMON 1,2,3,9 | Yes | |
| sFlow | Yes | |
| Security | | |
| Network Storm Protection, DoS | | |
| Broadcast, Unicast, Multicast DoS Protection | Yes | |
| Denial of Service Protection (control plane) | Yes | Switch CPU protection |
| Denial of Service Protection (data plane) | Yes | Switch Traffic protection |
| DoS attacks | SIPDIP SMACDMAC FIRSTFRAG TCPFRAG TCPFLAG TCPPORT UDPPORT TCPFLAGSEQ TCPOFFSET TCPSYN TCPSYNFIN TCPFINURGPSH L4PORT ICMPV4 ICMPV6 ICMPFRAG | |
| ICMP throttling | Yes | Restrict ICMP, PING traffic for ICMP-based DoS attacks |
| Management | | |
| Radius accounting | Yes | RFC 2565 and RFC 2866 |
| TACACS+ | Yes | |

| Network Traffic | | |
|--|---|---|
| Access Control Lists (ACLs) | L2 / L3 / L4 | MAC, IPv4, IPv6, TCP, UDP |
| Protocol-based ACLs | Yes | |
| ACL over VLANs | Yes | |
| Dynamic ACLs | Yes | |
| IEEE 802.1x Radius Port Access Authentication | Yes | Up to 48 clients (802.1x) per port are supported, including the authentication of the users domain |
| 802.1x MAB Address Authentication Bypass (MAB) | Yes | Supplemental authentication mechanism for non-802.1x devices, based on their MAC address only |
| Port Security | Yes | |
| IP Source Guard | Yes | |
| DHCP Snooping | Yes | |
| Dynamic ARP Inspection | Yes | |
| MAC Filtering | Yes | |
| Port MAC Locking | Yes | |
| Private Edge VLAN | Yes | A protected port doesn't forward any traffic (unicast, multicast, or broadcast) to any other protected port - same switch |
| Private VLANs | Yes | Scales Private Edge VLANs by providing Layer 2 isolation between ports across switches in same Layer 2 network |
| Quality of Service (QoS) - Summary | | |
| Access Lists | Yes | |
| L2 MAC, L3 IP and L4 Port ACLs | Yes | |
| Ingress | Yes | |
| 802.3ad (LAG) for ACL assignment | Yes | |
| Binding ACLs to VLANs | Yes | |
| ACL Logging | Yes | |
| Support for IPv6 fields | Yes | |
| DiffServ QoS | Yes | |
| Edge Node applicability | Yes | |
| Interior Node applicability | Yes | |
| 802.3ad (LAG) for service interface | Yes | |
| Support for IPv6 fields | Yes | |
| Ingress | Yes | |
| IEEE 802.1p COS | Yes | |
| 802.3ad (LAG) for COS configuration | Yes | |
| WRED (Weighted Deficit Round Robin) | Yes | |
| Strict Priority queue technology | Yes | |
| Auto-VoIP | Yes, based on protocols (SIP, H323 and SCCP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address | |
| QoS - ACL Feature Support | | |
| ACL Support (include L3 IP and L4 TCP/UDP) | Yes | |
| MAC ACL Support | Yes | |

| | | | |
|--|--|---------|--|
| IP Rule Match Fields | | | |
| Dest IP | | Inbound | |
| Dest IPv6 IP | | Inbound | |
| Dest L4 Port | | Inbound | |
| Every Packet | | Inbound | |
| IP DSCP | | Inbound | |
| IP Precedence | | Inbound | |
| IP TOS | | Inbound | |
| Protocol | | Inbound | |
| Source IP (for Mask support see below) | | Inbound | |
| Source IPv6 IP | | Inbound | |
| L3 IPv6 Flow Label | | Inbound | |
| Source L4 Port | | Inbound | |
| Supports Masking | | Inbound | |
| MAC Rule Match Fields | | | |
| COS | | Inbound | |
| Dest MAC | | Inbound | |
| Dest MAC Mask | | Inbound | |
| Ethertype | | Inbound | |
| Source MAC | | Inbound | |
| Source MAC Mask | | Inbound | |
| VLAN ID | | Inbound | |
| VLAN ID2 (Secondary VLAN) | | Yes | |
| Rules attributes | | | |
| Assign Queue | | Inbound | |
| Logging -- deny rules | | Inbound | |
| Mirror (to supported interface types only) | | Inbound | |
| Redirect (to supported interface types only) | | Inbound | |
| Interface | | | |
| Inbound direction | | Yes | |
| Supports LAG interfaces | | Yes | |
| Multiple ACLs per interface, inbound | | Yes | |
| Mixed-type ACLs per interface, inbound | | Yes | |
| Mixed L2/IPV4 ACLs per interface, inbound | | Yes | |
| QoS - DiffServ Feature Support | | | |
| DiffServ Supported | | Yes | |
| Class Type | | | |
| All | | Yes | |

| | | |
|--|---------|--|
| Class Match Criteria | | |
| COS | Inbound | |
| Dest IP (for Mask support see below) | Inbound | |
| Dest IPv6 IP | Inbound | |
| Dest L4 Port | Inbound | |
| Dest MAC (for Mask support see below) | Inbound | |
| Ethertype | Inbound | |
| Every Packet | Inbound | |
| IP DSCP | Inbound | |
| IP Precedence | Inbound | |
| IP TOS (for Mask support see below) | Inbound | |
| Protocol | Inbound | |
| Reference Class | Inbound | |
| Source IP (for Mask support see below) | Inbound | |
| Source IPv6 IP | Inbound | |
| L3 IPv6 Flow Label | Inbound | |
| Source L4 Port | Inbound | |
| Source MAC (for Mask support see below) | Inbound | |
| VLAN ID (Source VID) | Inbound | |
| Supports Masking | Inbound | |
| Policy Attributes -- Inbound | | |
| Assign Queue | Inbound | |
| Drop | Yes | |
| Mark COS | Yes | |
| Mark IP DSCP | Yes | |
| Mark IP Precedence | Yes | |
| Mirror (to supported interface types only) | Inbound | |
| Police Simple | Yes | |
| Police Color Aware Mode | Yes | |
| Service Interface | | |
| Inbound Slot.Port configurable | Yes | |
| Inbound 'All' Ports configurable | Yes | |
| Supports LAG interfaces | Yes | |
| Mixed L2/IPv4 match criteria, inbound | Yes | |
| PHB Support | | |
| EF | Yes | |
| AF4x | Yes | |
| AF3x | Yes | |
| AF2x | Yes | |
| AF1x | Yes | |
| CS | Yes | |
| Statistics -- Policy Instance | | |
| Offered | packets | |
| Discarded | packets | |
| QoS - COS Feature Support | | |
| COS Support | Yes | |
| Supports LAG interfaces | Yes | |
| COS Mapping Config | Yes | |
| Configurable per-interface | Yes | |
| IP DSCP Mapping | Yes | |

| | | | |
|---|--|---|---------------------------------|
| COS Queue Config | | | |
| Queue Parms configurable per-interface | | Yes | |
| Drop Parms configurable per-interface | | Yes | |
| Interface Traffic Shaping (for whole egress interface) | | Yes | |
| Minimum Bandwidth | | Yes | |
| Weighted Deficit Round Robin (WDRR) Support | | Yes | |
| Maximum Queue Weight | | 127 | |
| WRED Support | | Yes | |
| IEEE Network Protocols | | | |
| IEEE 802.3 Ethernet | IEEE 802.3az Energy Efficient Ethernet (select models) | IEEE 802.1s Multiple Spanning Tree (MSTP) | IEEE 802.1v Protocol-based VLAN |
| IEEE 802.3u 100BASE-T | IEEE 802.3ad Trunking (LACP) | IEEE 802.1w Rapid Spanning Tree (RSTP) | IEEE 802.1p Quality of Service |
| IEEE 802.3ab 1000BASE-T | IEEE 802.1AB LLDP with ANSI/TIA-1057 (LLDP-MED) | IEEE 802.1X Radius network access control | IEEE 802.3x Flow control |
| IEEE 802.3z Gigabit Ethernet 1000BASE-SX/LX | IEEE 802.1D Spanning Tree (STP) | IEEE 802.1Q VLAN tagging | IEEE 802.3af/IEEE 802.3at |
| IETF RFC Standards and MIBs | | | |
| System Facilities | | | |
| RFC 768 – UDP | RFC 2131 – DHCP Client/Server | | |
| RFC 783 – TFTP | RFC 2132 – DHCP options & BOOTP vendor extensions | | |
| RFC 791 – IP | RFC 2030 – Simple Network Time Protocol (SNTP) Version 4 for IPv4, IPv6 and OSI | | |
| RFC 792 – ICMP | RFC 2865 – RADIUS Client (both Switch and Management access) | | |
| RFC 793 – TCP | RFC 2866 – RADIUS Accounting | | |
| RFC 826 – Ethernet ARP | RFC 2868 – RADIUS Attributes for Tunnel Protocol support | | |
| RFC 894 – Transmission of IP datagrams over Ethernet networks | RFC 2869 – RADIUS Extensions | | |
| RFC 896 – Congestion control in IP/TCP Networks | RFC2869bis – RADIUS Support for Extensible Authentication Protocol (EAP) | | |
| RFC 951 – BOOTP | RFC 3164 – The BSD Syslog Protocol | | |
| RFC 1321 – Message-digest algorithm | RFC 3580 – 802.1X RADIUS usage guidelines (VLAN assignment via RADIUS, dynamic VLAN) | | |
| RFC 1534 – Interoperation between BOOTP and DHCP | | | |
| Switching MIB | | | |
| RFC 1213 – MIB-II | RFC 2620 – RADIUS Accounting MIB | | |
| RFC 1493 – Bridge MIB | RFC 2737 – Entity MIB version 2 | | |
| RFC 1643 – Ethernet-like MIB | RFC 2819 – RMON Groups 1,2,3 & 9 | | |
| RFC 2233 – The Interfaces Group MIB using SMI v2 | IEEE 802.1X MIB (IEEE 802.1-PAE-MIB 2004 Revision) | | |
| RFC 2674 – VLAN MIB | IEEE 802.1AB – LLDP MIB | | |
| RFC 2613 – SMON MIB | ANSI/TIA 1057 – LLDP-MED MIB | | |
| RFC 2618 – RADIUS Authentication Client MIB | Private Enterprise MIBs supporting switching features | | |

| | |
|--|---|
| IPv4 Routing | |
| RFC 1027 – Using ARP to implement transparent subnet Gateways (Proxy ARP) | RFC 2131 – DHCP relay |
| RFC 1256 – ICMP Router Discovery Messages | RFC 3046 – DHCP Relay Agent Information option |
| RFC 1812 – Requirements for IP Version 4 routers | VLAN routing |
| IPv4 Routing MIB | |
| RFC 2096 – IP Forwarding Table MIB | Private enterprise MIB supporting routing features |
| Multicast | |
| RFC 1112 – Host extensions for IP Multicasting | RFC 2710 – Multicast Listener Discovery (MLD) for IPv6 |
| RFC 2236 – Internet Group Management Protocol, Version 2 | RFC 3376 – Internet Group Management Protocol, Version 3 |
| RFC 2365 – Administratively Scoped IP Multicast | RFC 3810 – Multicast Listener Discovery Version 2 (MLDv2) for IPv6 |
| Multicast MIB | |
| Draft-ietf-magma-mgmd-mib-05 Multicast Group Membership Discovery MIB | Private Enterprise MIB supporting Multicast features |
| IPv6 Routing | |
| RFC 1981 – Path MTU for IPv6 | RFC 3484 – Default Address Selection for IPv6 |
| RFC 2460 – IPv6 Protocol specification | RFC 3493 – Basic Socket Interface for IPv6 |
| RFC 2461 – Neighbor Discovery | RFC 3542 – Advanced Sockets API for IPv6 |
| RFC 2462 – Stateless Auto Configuration | RFC 3587 – IPv6 Global Unicast Address Format |
| RFC 2464 – IPv6 over Ethernet | RFC 3736 – Stateless DHCPv6 |
| IPv6 Routing MIB | |
| RFC 2465 – IPv6 MIB | RFC 2466 – ICMPv6 MIB |
| QoS | |
| RFC 2474 – Definition of Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers | RFC 3260 – New Terminology and Clarifications for DiffServ |
| RFC 2475 – An Architecture for Differentiated Services | RFC 3289 – Management Information Base for the Differentiated Services Architecture (read-only) |
| RFC 2597 – Assured Forwarding PHB Group | Private MIBs for full configuration of DiffServ, ACL and CoS functionality |
| RFC 3246 – An Expedited Forwarding PHB (Per-Hop Behavior) | |
| Management | |
| RFC 854 – Telnet | RFC 3412 – Message Processing & Dispatching |
| RFC 855 – Telnet Option | RFC 3413 – SNMP Applications |
| RFC 1155 – SMI v1 | RFC 3414 – User-Based Security Model |
| RFC 1157 – SNMP | RFC 3415 – View-based Access Control Model |
| RFC 1212 – Concise MIB Definitions | RFC 3416 – Version 2 of SNMP Protocol Operations |

| | | |
|--|--|---|
| RFC 1867 – HTML/2.0 Forms with file upload extensions | RFC 3417 – Transport Mappings | |
| RFC 1901 – Community-based SNMP v2 | RFC 3418 – Management Information Base (MIB) for the Simple Network Management Protocol (SNMP) | |
| RFC 1908 – Coexistence between SNMP v1 & SNMP v2 | <p>SSL 3.0 and TLS 1.0</p> <ul style="list-style-type: none"> - RFC 2246 – The TLS Protocol, Version 1.0 - RFC 2818 – HTTP over TLS - RFC 2346 – AES Ciphersuites for Transport Layer Security <p>SSH 1.5 and 2.0</p> <ul style="list-style-type: none"> - RFC 4253 – SSH Transport Layer Protocol - RFC 4252 – SSH Authentication Protocol - RFC 4254 – SSH Connection Protocol - RFC 4251 – SSH Protocol Architecture - RFC 4716 – SECSH Public Key File Format - RFC 4419 – Diffie-Hellman Group Exchange for the SSH Transport Layer Protocol | |
| RFC 2068 – HTTP/1.1 protocol as updated by draft-ietf-http-v11-spec-rev-03 | | |
| RFC 2271 – SNMP Framework MIB | | |
| RFC 2295 – Transparent Content Negotiation | | |
| RFC 2296 – Remote Variant Selection; RSVP/1.0 State Management “cookies” – draft-ietf-http-state-mgmt-05 | | |
| RFC 2576 – Coexistence between SNMP v1, v2 and v3 | | |
| RFC 2578 – SMI v2 | | |
| RFC 2579 – Textual Conventions for SMI v2 | | |
| RFC 2580 – Conformance statements for SMI v2 | | |
| RFC 3410 – Introduction and Applicability Statements for Internet Standard Management Framework | | |
| RFC 3411 – An Architecture for Describing SNMP Management Frameworks | | |
| Management | | |
| Password management | Yes | |
| Configurable Management VLAN | Yes | |
| Auto Install (BOOTP and DHCP options 66, 67, 150 and 55, 125) | Yes | Scalable deployment process (firmware, config) |
| Admin access control via Radius and TACACS+ | Yes | Policies, Enable |
| Industry standard CLI (IS-CLI) | Yes | Command Line interface |
| CLI commands logged to a Syslog server | Yes | |
| Web-based graphical user interface (GUI) | Yes | Fully functional GUI |
| Telnet | Yes | |
| IPv6 management | Yes | |
| Dual Software (firmware) image | Yes | Allows non disruptive firmware upgrade process |
| Dual Configuration file | Yes | Text-based (CLI commands) configuration file |
| IS-CLI Scripting | Yes | Industry standard CLI commands scripts for automation |
| Port descriptions | Yes | |
| SNTP client over UDP port 123 | Yes | Provides synchronized network timestamp either in broadcast or unicast mode |
| XMODEM | Yes | |
| SNMP v1/v2 | Yes | |
| SNMP v3 with multiple IP addresses | Yes | |

| | | |
|--|-----------------------------|--------------|
| RMON 1,2,3,9 | Yes | |
| Max History entries | 3 * (port count + LAG + 10) | |
| Max buckets per History entry | 10 | |
| Max Alarm entries | 3 * (port count + LAG + 10) | |
| Max Event entries | 3 * (port count + LAG + 10) | |
| Max Log entries per Event entry | 10 | |
| Port Mirroring | Yes | |
| Number of monitor sessions | 1 | |
| Tx/Rx | Yes | |
| Many to One Port Mirroring | Yes | |
| LAG supported as source ports | Yes | |
| Max source ports in a session | Total switch port count | |
| Flow based mirroring | Yes | |
| Cable Test utility | Yes | CLI, Web GUI |
| Traceroute feature | Yes | |
| Outbound Telnet | Yes | |
| SSH | v1 / v2 | Secure Shell |
| SSH Session Configuration | Yes | |
| SSL/HTTPS and TLS v1.0 for web-based access | Yes | |
| File transfers (uploads, downloads) | TFTP / HTTP | |
| Secured protocols for file transfers | SCP / SFTP / HTTPS | |
| HTTP Max Sessions | 16 | |
| SSL/HTTPS Max Sessions | 16 | |
| HTTP Download (firmware) | Yes | |
| Syslog (RFC 3164) | Yes | |
| Persistent log supported | Yes | |
| User Admin Management | | |
| User ID configuration | Yes | |
| Max number of configured users | 6 | |
| Support multiple READWRITE Users | Yes | |
| Max number of IAS users (internal user database) | 100 | |
| Authentication login lists | Yes | |
| Authentication Enable lists | Yes | |
| Authentication HTTP lists | Yes | |
| Authentication HTTPS lists | Yes | |
| Authentication Dot1x lists | Yes | |
| Accounting Exec lists | Yes | |
| Accounting Commands lists | Yes | |

| | | |
|--|--------------------------------------|--|
| Login History | 50 | |
| M4100 series - Platform Constants | | |
| Maximum number of remote Telnet connections | 5 | |
| Maximum number of remote SSH connections | 5 | |
| Number of MAC Addresses | 16K | |
| Number of VLANs | 1K | |
| VLAN ID Range | 1 - 4093 | |
| Number of 802.1p Traffic Classes | 8 classes | |
| IEEE 802.1x Number of .1x clients per port | 48 | |
| Number of LAGs | 12 LAGs with up to 8 ports per group | |
| Maximum multiple spanning tree instances | 32 | |
| MAC based VLANs Number supported | Yes 256 | |
| Number of log messages buffered | 200 | |
| Static filter entries Unicast MAC and source port Multicast MAC and source port Multicast MAC and destination port (only) | 20 20 256 | |
| Subnet based VLANs Number supported | Yes 128 | |
| Protocol Based VLANs Max number of groups Max protocols | Yes 128 16 | |
| Maximum Multicast MAC Addresses entries | 1K | |
| Jumbo Frame Support Max Size Supported | Yes 9k | |
| Number of DHCP snooping bindings | 16K | |
| Number of DHCP snooping static entries | 1024 | |
| LLDP-MED number of remote nodes | 48 | |
| Port MAC Locking Dynamic addresses per port Static addresses per port | Yes 4096 48 | |
| sFlow Number of samplers Number of pollers Number of receivers | 32 52 8 | |
| Radius Max Authentication servers Max Accounting servers | 5 1 | |
| Number of routing interfaces (including port/vlan) | 64 | |

M4100 series

| | | |
|---|--|---|
| Number of static routes (v4) | 64 | |
| Routing Heap size IPv4 | 256K | |
| DHCP Server Max number of pools Total max leases | 16 1024 | |
| DNS Client Concurrent requests Name server entries Seach list entries Static host entries Cache entries Domain search list entries | 16 8 6 64 128 32 | |
| Number of Host Entries (ARP/NDP) IPv4 build Static v4 ARP Entries | 512 16 | including 509 user configurable entries |
| Number of ECMP Next Hops per Route | 1 | |
| ACL Limits Maximum Number of ACLs (any type) Maximum Number Configurable Rules per List Maximum ACL Rules per Interface and Direction (IPv4/L2) Maximum ACL Rules per Interface and Direction (IPv6) Maximum ACL Rules (system-wide) Maximum ACL Logging Rules (system-wide) | 50 509 509 509 4K 32 | |
| COS Device Characteristics Configurable Queues per Port Configurable Drop Precedence Levels | 8 queues 3 | |
| DiffServ Device Limits Number of Queues Requires TLV to contain all policy instances combined Max Rules per Class Max Instances per Policy Max Attributes per Instance Max Service Interfaces Max Table Entries Class Table Class Rule Table Policy Table Policy Instance Table Policy Attribute Table Max Nested Class Chain Rule Count | 8 queues Yes 6 28 3 50 interfaces 32 192 64 768 2304 12 | |
| AutoVoIP number of voice calls | 16 | |
| LEDs | | |
| Per port | Speed, Link, Activity, PoE | |
| Per device | Power, Fan, RPS or PD Mode, Max PoE | |
| Physical Specifications | | |
| Dimensions (Width x Depth x Height) | | |
| M4100-D10-POE | 328 x 169 x 43.2 mm (12.91 x 6.65 x 1.7 in) | |

M4100 series

| | | |
|--|--|--|
| M4100-26-POE | 440 x 257 x 43.2 mm (17.32 x 10.12 x 1.7 in) | |
| M4100-50-POE | 440 x 310 x 43.2 mm (17.32 x 12.20 x 1.7 in) | |
| M4100-D12G | 328 x 169 x 43.2 mm (12.91 x 6.65 x 1.7 in) | |
| M4100-D12G-POE+ | 331 x 208 x 43.2 mm (13.03 x 8.19 x 1.7 in) | |
| M4100-12GF | 440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in) | |
| M4100-12G-POE+ | 440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in) | |
| M4100-26G | 440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in) | |
| M4100-50G | 440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in) | |
| M4100-26G-POE | 440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in) | |
| M4100-24G-POE+ | 440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in) | |
| M4100-50G-POE+ | 440 x 310 x 43.2 mm (17.32 x 12.20 x 1.7 in) | |
| Weight | | |
| M4100-D10-POE | 2.8 kg (6.1 lb) | |
| M4100-26-POE | 4.13 kg (9.1 lb) | |
| M4100-50-POE | 4.96 kg (10.9 lb) | |
| M4100-D12G | 1.33 kg (2.9 lb) | |
| M4100-D12G-POE+ | 2.596 kg (5.73 lb) | |
| M4100-12GF | 3.665 kg (8.08 lb) | |
| M4100-12G-POE+ | 4.021 kg (8.86 lb) | |
| M4100-26G | 3.24 kg (7.1 lb) | |
| M4100-50G | 3.63 kg (8.0 lb) | |
| M4100-26G-POE | 3.79 kg (8.36 lb) | |
| M4100-24G-POE+ | 4.368 kg (9.63 lb) | |
| M4100-50G-POE+ | 4.96 kg (10.9lb) | |
| Power Consumption (all ports used, line-rate traffic, max PoE) | | |
| M4100-D10-POE | 87.30W max | |
| M4100-26-POE | 456.29W max | |
| M4100-50-POE | 486.64W max | |
| M4100-D12G | 18.80W max | |
| M4100-D12G-POE+ | 166.60W max | |
| M4100-12GF | 160.60W max | |
| M4100-12G-POE+ | 452W max | |

| | | |
|--|---|--|
| M4100-26G | 31.60W max | |
| M4100-50G | 49.50W max | |
| M4100-26G-POE | 272.90W max | |
| M4100-24G-POE+ | 533W max | |
| M4100-50G-POE+ | 555.50W max | |
| Environmental Specifications | | |
| Operating: Temperature Humidity Altitude | 32° to 122°F (0° to 50°C) 90% maximum relative humidity, non-condensing 10,000 ft (3,000 m) maximum | |
| Storage: Temperature Humidity Altitude | - 4° to 158°F (-20° to 70°C) 95% maximum relative humidity, non-condensing 10,000 ft (3,000 m) maximum | |
| Electromagnetic Emissions and Immunity | | |
| Certifications | CE mark, commercial FCC Part 15 Class A, VCCI Class A Class A EN 55022 (CISPR 22) Class A Class A C-Tick EN 50082-1 EN 55024 | |
| Safety | | |
| Certifications | CE mark, commercial CSA certified (CSA 22.2 #950) UL listed (UL 1950)/cUL IEC 950/EN 60950 CB CCC | |
| Package Content | | |
| All models | ProSAFE® M4100 series switch Power cord Rubber footpads for tabletop installation Rubber caps for the SFP sockets Mini-USB console cable with one Mini B connector and one type A connector Resource CD with links to online documentation: <i>USB drivers for the Mini-USB console; Switch MIB; ProSAFE M4100 Managed Switch Quick Installation Guide, ProSAFE M4100 Hardware Installation Guide; ProSAFE Managed Switch Command-Line Interface (CLI) User Manual; ProSAFE M4100 and M7100 Managed Switches Administration Manual</i> Technical Documentation online repository: http://www.downloads.netgear.com/docs/m4100/enu/202-11161-01/ | |
| Rackmount models M4100-26-POE; M4100-50-POE M4100-12GF; M4100-12G-POE+; M4100-26G; M4100-50G M4100-26G-POE; M4100-24G-POE+; M4100-50G-POE+ | Rack-mounting kit | |
| Desktop models M4100-D10-POE; M4100-D12G; M4100-D12G-POE+ | Wall-mounting kit | |

M4100 series

| | | |
|---|---|--|
| Desktop models M4100-D10-POE; M4100-D12G | | AC external power adapter magnetic mounting kit (set of magnets) |
| Optional Modules and Accessories | | |
| All models: AFM735 AGM731F AGM732F | 100Base-FX SFP GBIC (Multimode) 100Base-SX SFP GBIC (Multimode) 100Base-LX SFP GBIC (Single mode) | Ordering SKU: AFM735-10000S AGM731F AGM732F |
| All rackmount models: RPS5412 RPS4000 APS1000W | Optimal Power® Redundant Power Supply (one switch - RPS mode only) External/Redundant Power Supply (up to four switches - RPS or EPS mode) Power Module for RPS4000 | RPS5412-100NAS /-100EUS /-100AJS RPS4000-100NES /-100AJS APS1000W-100NES /-100AJS |
| All desktop models: 420-10043-01 | Rack mount kit for M4100 series desktop versions | 420-10043-01 |
| Warranty and Support | | |
| ProSAFE Lifetime Warranty† | | Included, lifetime |
| ProSupport Lifetime 24x7 Advanced Technical Support* | | Included, lifetime |
| Next Business Day onsite hardware replacement support** | | Included, 3 years |
| ProSupport Service Packs | | |
| 3-year Next Business Day hardware replacement contract | | |
| ≤ 26-port versions XPressHW, Category 2 | PRR0332 service contract | M4100-D10-POE; M4100-26-POE; M4100-50-POE; M4100-D12G; M4100-D12G-POE+; M4100-12GF; M4100-12G-POE+; M4100-26G; M4100-26G-POE; M4100-24G-POE+ |
| ≥ 50-port versions XPressHW, Category 3 | PRR0333 service contract | M4100-50G; M4100-50G-POE+ |
| Packs Ordering Information | | |
| M4100-D10-POE Americas, Europe Asia Pacific China | Desktop 8 ports Fast Ethernet PoE 802.3af, Layer 2+ software package FSM5210P-100NES FSM5210P-100AJS FSM5210P-100PRS | |
| M4100-26-POE Americas, Europe Asia Pacific China | 24 ports Fast Ethernet PoE 802.3af, Layer 2+ software package FSM7226P-100NES FSM7226P-100AJS FSM7226P-100PRS | |
| M4100-50-POE Americas, Europe Asia Pacific China | 48 ports Fast Ethernet PoE 802.3af, Layer 2+ software package FSM7250P-100NES FSM7250P-100AJS FSM7250P-100PRS | |
| M4100-D12G Americas, Europe Asia Pacific China | Desktop 12 ports Gigabit, Layer 2+ software package GSM5212-100NES GSM5212-100AJS GSM5212-100PRS | |
| M4100-D12G-POE+ Americas, Europe Asia Pacific China | Desktop 12 ports Gigabit PoE+ 802.3at, Layer 2+ software package GSM5212P-100NES GSM5212P-100AJS GSM5212P-100PRS | V1H2 V1H2 V1H2 |
| M4100-12GF Americas, Europe Asia Pacific China | 12 ports Gigabit Fiber, Layer 2+ software package GSM7212F-100NES GSM7212F-100AJS GSM7212F-100PRS | V1H2 V1H2 V1H2 |

M4100 series

| | | |
|---|--|------------------------------|
| M4100-12G-POE+ Americas, Europe Asia Pacific China | 12 ports Gigabit PoE+ 802.3at, Layer 2+ software package GSM7212P-100NES GSM7212P-100AJS GSM7212P-100PRS | V1H2 V1H2 V1H2 |
| M4100-26G Americas Europe Asia Pacific China | 26 ports Gigabit, Layer 2+ software package GSM7224-200NAS GSM7224-200EUS GSM7224-200AJS GSM7224-200PRS | V2H2 V2H2 V2H2 V2H2 |
| M4100-50G Americas Europe Asia Pacific China | 50 ports Gigabit, Layer 2+ software package GSM7248-200NAS GSM7248-200EUS GSM7248-200AJS GSM7248-200PRS | V2H2 V2H2 V2H2 V2H2 |
| M4100-26G-POE Americas, Europe Asia Pacific China | 24 ports Gigabit PoE 802.3af, Layer 2+ software package GSM7226LP-100NES GSM7226LP-100AJS GSM7226LP-100PRS | |
| M4100-24G-POE+ Americas, Europe Asia Pacific vChina | 24 ports Gigabit PoE+ 802.3at, Layer 2+ software package GSM7224P-100NES GSM7224P-100AJS GSM7224P-100PRS | V1H2 V1H2 V1H2 |
| M4100-50G-POE+ Americas, Europe Asia Pacific China | 48 ports Gigabit PoE+ 802.3at, Layer 2+ software package GSM7248P-100NES GSM7248P-100AJS GSM7248P-100PRS | |

NETGEAR, the NETGEAR Logo, and ProSAFE are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. © 2013 NETGEAR, Inc. All rights reserved.

† Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 5 years.

* 24x7 Lifetime Advanced Technical Support includes Remote Diagnostics performed by our technical experts for prompt resolution of technical issues.

** 3-year Next business day onsite hardware replacement support included: see <http://onsite.netgear.com> for coverage, availability and terms and conditions.